



## MOUNTING - LOOK KEO BLADE CARBON CHANGE


**1** Place LOOK Kéo Blade carbon in this position




**2**

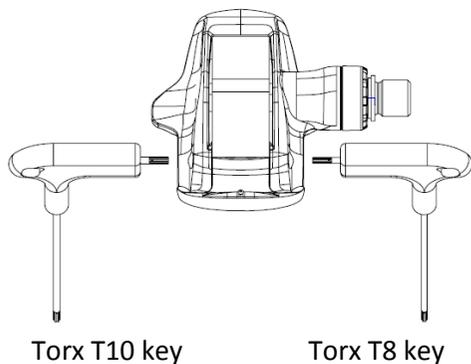

**3** Unscrew on the left while maintaining to the right with a T10 key

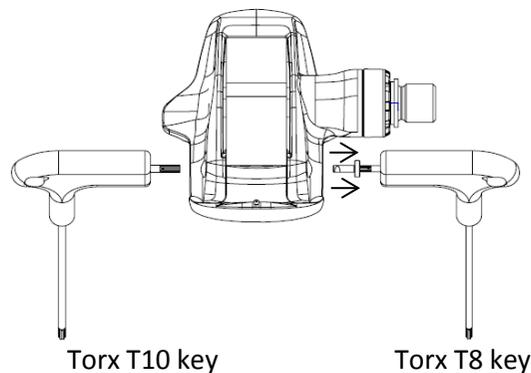


**4** Then, push with the T10 key to remove the screw inside (shouldered pin)

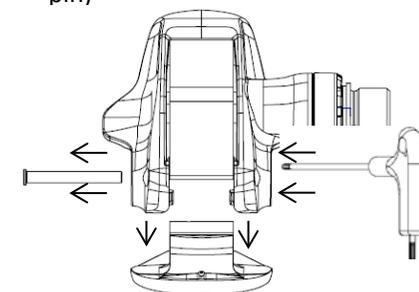


The lever and the blade are no longer attached to the pedal body now


**5**      **6** Clean the pedal body now.

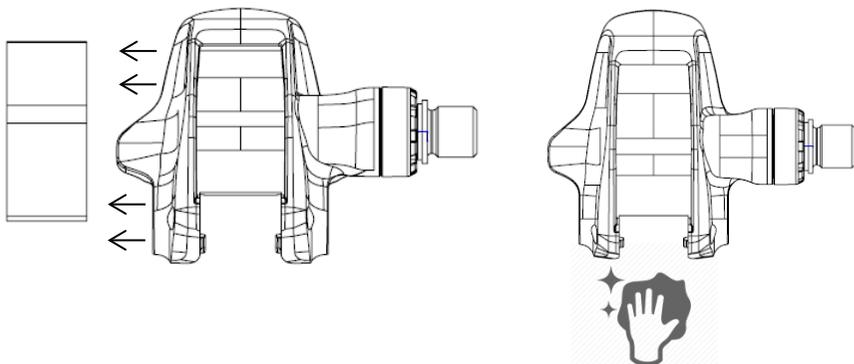

**7** Position the new blade in its seat with the tension marking towards the lever. Then, position the lever in the body pedal.

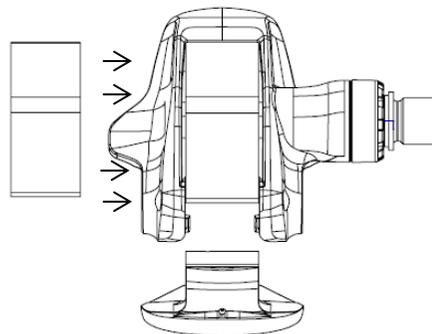


**8** Position the small silver guide supplied with the blade kit in the hollow part of the lever pin.




**9** Insert the lever pin with the small silver guide in the body pedal

**10**

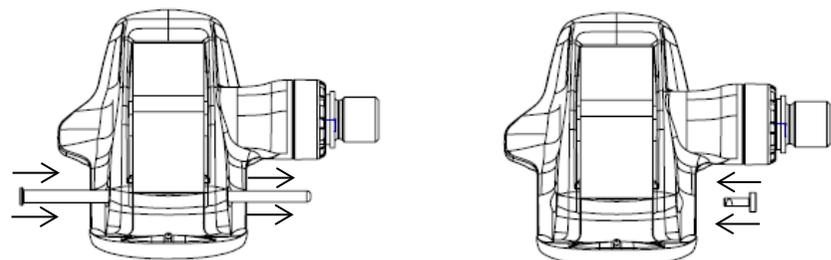

**11** Tighten the Torx screw to a 2.5 Newton meter using the Torx wrench while maintain with the other hand using the Torx T10 key.

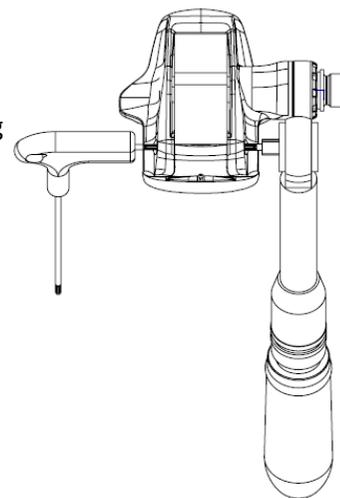

### MATERIAL NEEDED :

- Torx T10 key
- Torx T8 key
- Pin drift
- Torque wrench with Torx T8 bit

### NECESSARY TIME

