


RACE GEOMETRY

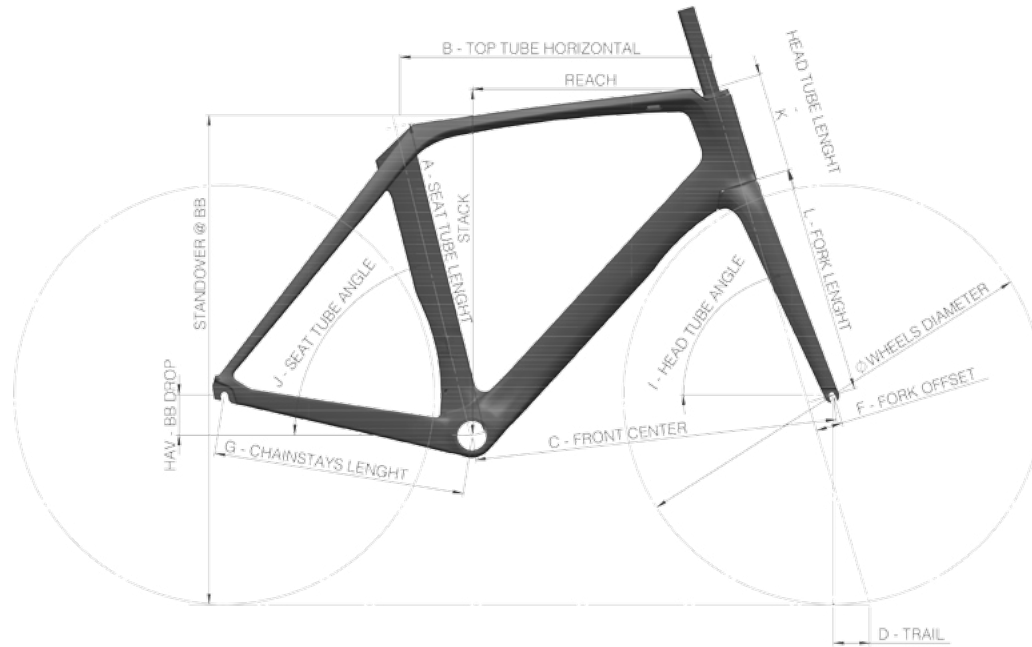

795 BLADE RS GEOMETRY WHEELS DIAMETER IN MM : 680

	Stack	Reach	I	J	A	B	C	D	F	G	K	L	HAV	Standover
	(mm)	(mm)	(°)	(°)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
XS	505	367	71,8	75,8	445,0	494,1	567,7	59,2	50	405	111,9	368,0	65	745
S	529	377	71,8	75,8	469,7	510,1	585,5	59,2	50	405	137,1	368,0	65	668
M	553	386	73,0	75,8	494,4	526,2	584,3	59,0	43	405	155,7	368,0	65	793
L	578	396	73,0	75,8	519,2	545,0	601,5	59,0	43	405	180,8	368,0	65	818
XL	601	406	73,0	75,8	544,0	558,3	618,8	59,0	43	405	205,9	368,0	65	841

795 BLADE RS DISC GEOMETRY WHEELS DIAMETER IN MM : 686

	Stack	Reach	I	J	A	B	C	D	F	G	K	L	HAV	Standover
	(mm)	(mm)	(°)	(°)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
XS	505	367	71,8	75,8	445,0	494,1	567,7	60,1	50	415	111,9	368,0	65	748
S	529	377	71,8	75,8	469,7	510,1	585,5	60,1	50	415	137,1	368,0	65	771
M	553	386	73,0	75,8	494,4	526,2	584,3	59,9	43	415	155,7	368,0	65	796
L	578	396	73,0	75,8	519,2	545,0	601,5	59,9	43	415	180,8	368,0	65	821
XL	601	406	73,0	75,8	544,0	558,3	618,8	59,9	43	415	205,9	368,0	65	844