


GEO- ME- TRY

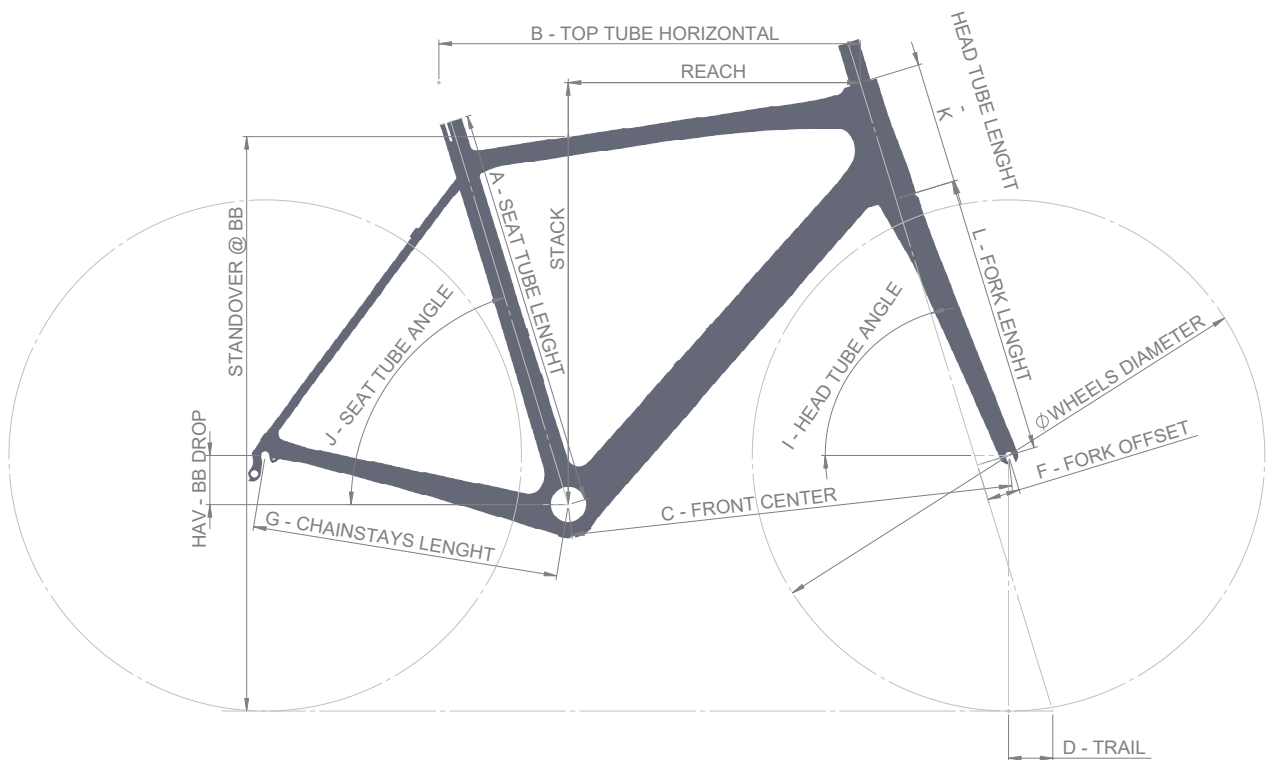

796 GEOMETRY WHEELS DIAMETER IN MM : 676

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XS - S	488,0	382,0	72,0	76,5	570,0	498,0	570,0	61,5	46,0	405,0	77,7	371,5	75,0	781,0
S - M	522,5	409,0	72,0	76,5	606,0	533,0	608,0	61,5	46,0	405,0	114,0	371,5	75,0	815,5
L - XL	557,0	436,0	72,0	76,5	641,0	568,0	646,0	61,5	46,0	405,0	150,3	371,5	75,0	850,0

RACE GEOMETRY**795 AEROLIGHT / 795 LIGHT RS GEOMETRY** WHEELS DIAMETER IN MM : 676

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XS	510	365	71,8	74	680	512,9	567,7	58,5	50	405	116,9	368,0	65	725,5
S	534	375	71,8	74	705	530,0	585,5	58,5	50	405	142,1	368,0	65	751,0
M	558	385	73,0	73	750	555,7	584,4	58,4	43	405	161,0	368,0	65	768,0
L	582	395	73,0	73	775	572,9	601,5	58,4	43	405	184,7	368,0	65	799,5
XL	606	405	73,0	73	795	590,3	618,8	58,4	43	405	210,9	368,0	65	821,7


RACE GEOMETRY**785 GEOMETRY** WHEELS DIAMETER IN MM : 676

	Stack (en) (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)
XS	510,0	365,0	71,8	74,0	480,0	511,2	567,7	58,5	50,0	405,0	116,9	368,0	65,0
S	534,0	375,0	71,8	74,0	504,0	528,1	585,5	58,5	50,0	405,0	142,1	368,0	65,0
M	558,0	385,0	73,0	73,0	530,0	555,7	584,4	58,4	43,0	405,0	161,0	368,0	65,0
L	582,0	395,0	73,0	73,0	554,0	572,9	601,5	58,4	43,0	405,0	184,7	368,0	65,0
XL	606,0	405,0	73,0	73,0	579,0	590,3	618,8	58,4	43,0	405,0	210,9	368,0	65,0

RACE GEOMETRY**765 GEOMETRY** WHEELS DIAMETER IN MM : 676

	Stack (mm)	Reach (mm)	I (°) (mm)	J (°) (mm)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)
XS	530,0	355,0	70,8	74,0	470,0	507,0	572,9	64,8	50,0	410,0	138,6	368,0	68,0
S	554,0	365,0	70,8	74,0	490,0	523,9	591,1	64,8	50,0	410,0	164,0	368,0	68,0
M	578,0	375,0	72,0	73,0	510,0	551,7	589,9	64,6	43,0	410,0	182,2	368,0	68,0
L	602,0	385,0	72,0	73,0	535,0	569,1	607,1	64,6	43,0	410,0	206,3	368,0	68,0
XL	626,0	395,0	72,0	73,0	560,0	586,4	625,2	64,6	43,0	410,0	232,7	368,0	68,0

ENDURANCE GEOMETRY

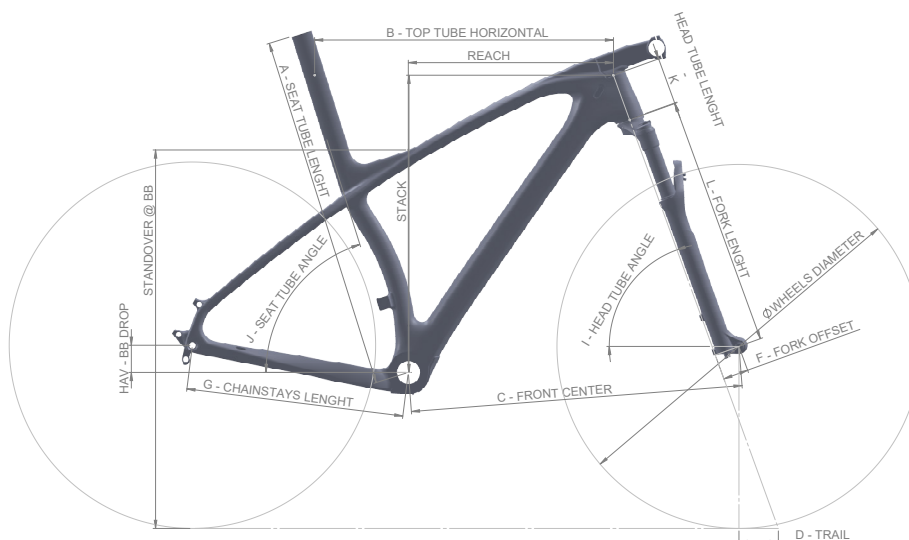

989 GEOMETRY WHEELS DIAMETER IN MM : 736

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
M	600	415	70	72,5	720	604,2	669,9	79,7	51	440	94,1	503,4	55	763,5
L	615	440	70	72,5	770	633,9	700,3	79,7	51	440	110,1	503,4	55	760,6

* +1 for headset

987 GEOMETRY WHEELS DIAMETER IN MM : 698

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XS	567	370	70	72,5	620	548,8	610,1	81,3	43	430	92	487,7	36	752,8
S	575	390	70	72,5	670	571,3	633,0	81,3	43	430	100,5	487,7	36	752,8


* +1 for headset

979 GEOMETRY WHEELS DIAMETER IN MM : 736

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
S	599,1	378,0	70,0	72,0	395,0	575,8	637,7	81,0	51,0	438,0	103,0	503,4	54,6	724,5
M	607,9	410,0	71,3	72,3	423,0	605,7	662,7	86,3	46,0	438,0	109,9	503,4	54,6	747,2
L	631,1	420,8	71,3	72,3	480,0	622,4	666,9	76,1	46,0	438,0	119,9	503,4	54,6	792,1

977 GEOMETRY WHEELS DIAMETER IN MM : 698

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XS	575,1	370,0	70,0	73,6	370,0	539,3	609,9	86,2	43,0	430,0	90,0	487,7	46,6	688,1
S	582,4	388,6	70,6	73,6	383,0	559,8	625,5	76,5	44,0	430,0	95,0	487,7	46,6	684,1
M	591,6	410,2	70,6	73,6	423,0	584,9	651,0	76,5	44,0	430,0	105,0	487,7	46,6	722,2

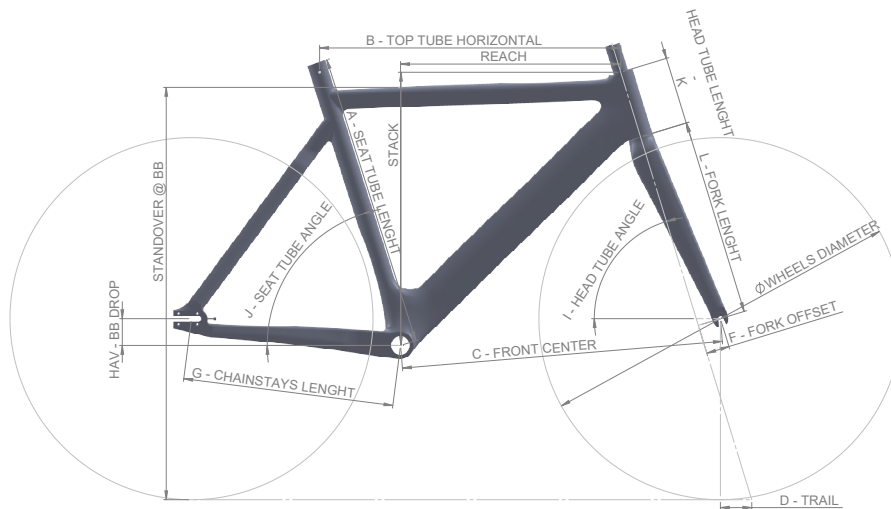

R96 GEOMETRY WHEELS DIAMETER IN MM : 676

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XXS	486,0	359,0	72,5	74,5	515,0	495,0	544,0	61,0	34,0	380,0	115,0	368,0	50,0	746,0
XS	486,0	381,0	72,5	74,5	515,0	516,0	566,0	61,0	34,0	380,0	126,5	368,0	50,0	758,0
S	507,0	394,0	74,5	74,5	545,0	535,0	559,0	58,0	34,0	380,0	140,0	368,0	50,0	799,0
M	535,0	412,0	74,5	74,5	575,0	560,0	584,0	58,0	34,0	380,0	169,0	368,0	50,0	828,0

875 MADISON GEOMETRY WHEELS DIAMETER IN MM : 678

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XS	480,0	360,0	73,0	73,5	500,0	502,0	539,0	59,0	43,0	380,0	95,0	368,0	50,0	745,0
S	495,0	385,0	73,0	73,5	525,0	531,5	568,0	59,0	43,0	380,0	110,5	368,0	50,0	760,0
M	510,0	410,0	73,0	73,5	550,0	561,0	598,0	59,0	43,0	380,0	126,0	368,0	50,0	774,0
L	525,0	435,0	73,0	73,5	570,0	590,5	627,0	59,0	43,0	380,0	142,0	368,0	50,0	790,0
XL	540,0	460,0	73,0	73,5	590,0	620,0	657,0	59,0	43,0	380,0	157,5	368,0	50,0	805,0

AL 464 P GEOMETRY WHEELS DIAMETER IN MM : 676

	Stack (mm)	Reach (mm)	I (°)	J (°)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)	Standover (mm)
XS	504,1	370,4	73,0	73,5	505,0	519,6	556,6	58,4	43,0	402,0	121,0	368,0	49,0	747,7
S	519,1	386,2	73,5	73,5	525,0	539,9	572,4	55,3	43,0	402,0	135,0	368,0	49,0	766,9
M	547,8	402,7	73,5	73,5	555,0	564,9	597,3	55,3	43,0	402,0	165,0	368,0	49,0	795,8
L	567,0	417,0	73,5	73,5	575,0	584,9	617,3	55,3	43,0	402,0	185,0	368,0	49,0	815,0

* +11,5 for headset